



Our Know-how – Your Advantage

Our flame-retardant TPEs are halogen-free and your solution for high fire protection requirements. These special compounds are self-extinguishing and characterized by low toxicity. Different hardnesses and colors are available.

- Halogen-free flame retardant
- UL 94 V-0
 - » FR1 series @ 3 mm (Yellow Card)
 - » FR3 series @ 1.5 mm (Yellow Card)
- Certification according DIN EN 45545-2 R22 HL3 and R23 HL3
- UL-listings for all colors and hardnesses
- Processing via injection molding and extrusion
- Excellent adhesion to Polyolefines (PP)
- Excellent Glow Wire Ignition Temperature
- Low long-term compression set at elevated temperatures


Johanna Schmid

Market specialist

“Our halogen-free flame retardant TPEs score highly in terms of safety and health in use thanks to their low smoke gas toxicity in the event of fire. Users of halogen-free product solutions also benefit when it comes to disposal at the end of the product life cycle.”

Typical Applications

- Cable management systems
- Grommets
- Cable glands
- Busbars

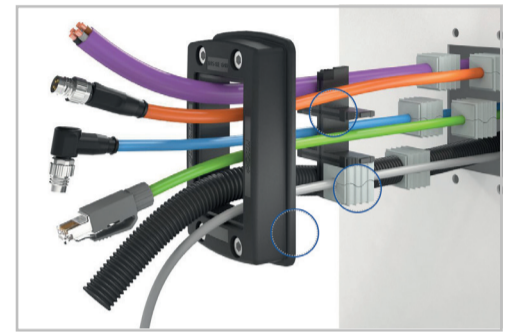

Technical Data

		TC7FRN (FR1 Series)	TC7OFR-NTRL (FR3 Series)
Hardness	Sh A	65	70
Density	g/cm ³	1.13	1.15
Tensile Strength	MPa	4.0	5.5
Tear Resistance	N/mm	20.0	20.0
CS 72 h/23 °C	%	20	20
CS 22 h/70 °C	%	45	40
CS 22 h/100 °C	%	85	65
UL 94 Vertical Burning		V0 (3 mm) (Yellow Card)	V0 (1.5 mm) (Yellow Card)
LOI	%	< 32	> 32
GWFI @ 2 mm	°C	-	960 (Internal test)
GWFI @ 3 mm	°C	960	-
DIN EN 45545-2 R22 HL3 and R23 HL3		-	yes

TALK TO OUR EXPERTS!

KRAIBURG TPE GMBH & CO. KG - EUROPE, MIDDLE EAST, AFRICA

✉ info@kraiburg-tpe.com

KRAIBURG TPE TECHNOLOGY (M) SDN. BHD. - ASIA PACIFIC

✉ info-asia@kraiburg-tpe.com

KRAIBURG TPE CORPORATION - AMERICAS

✉ info-america@kraiburg-tpe.com